



NEW HOLLAND

D85B D95B SIDEBOOM DOZERS



- Easy-To-Operate, Three-Lever Hydraulic Control
- Convenient Folding Sideboom for Ease of Transportation
- Quick Release Hinge Pins for Easy Boom Removal and Maintenance
- Heavy Operating Weight Provides Outstanding Stability



BUILT AROUND YOU

D85B D95B SIDEBOOM DOZERS

TIME-SAVING SERVICING

New Holland crawler dozers have the leading SAE point score for periodic maintenance compared to other dozers. That means less time and money maintaining your equipment and more time on the job making money.

Fast routine maintenance


- Maintenance points are conveniently grouped together
- Engine and service compartment panels are easy to open from the ground and without tools
- Hydraulic sight glass, radiator sight bubble, and coolant bottle provide easy fluid-level checks with a quick glance
- Filters are easy to reach and change—including spin-on, vertically mounted hydraulic filters that can be reached through a hinged door

Easy undercarriage and track cleanout


- No-hassle cleaning even after operating in sticky, muddy, or freezing conditions
- The open final drive area and open chassis design provide a large escape route for rocks and mud
- Steep-angle covers on the track frame and streamlined track frame supports shed dirt easily
- New Venturi Cone system improves muffler life and reduces exhaust stack vibrations

Onboard diagnostics

- Simplifies trouble-shooting and minimizes costly downtime
- A diagnostic pressure test panel and a cab-accessible electrical system diagnostic display provide fault codes to spot potential problems quickly

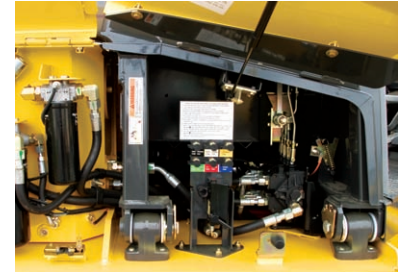

An industry-leading SAE maintainability index means that a crawler dozer from New Holland takes less time and effort to service than other models on the market.

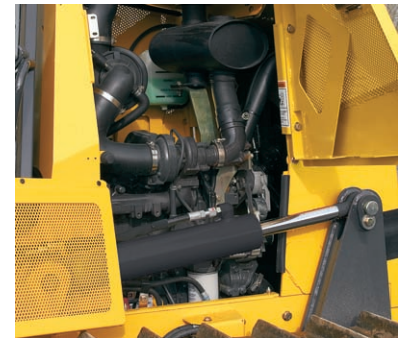

Sideboom and installation provided by
Midwestern Manufacturing Company

	D85B Sideboom WT*	D85B Sideboom LGP	D95B Sideboom WT	D85B Sideboom LGP
Engine	FPT 445TA/E66	FPT 445TA/E66	FPT 445TA/E66	FPT 445TA/E66
Net Power, hp (kW)	85 (63)	85 (63)	96 (72)	96 (72)
Operating Weight	25,900 lbs	26,400 lbs	26,400 lbs	26,900 lbs
Hydraulic Flow	20.3 gpm	20.3 gpm	20.3 gpm	20.3 gpm
Hydraulic Pressure	3000 psi	3000 psi	3000 psi	3000 psi
Adjustable Counterweights	2 @ 1120 lbs each	2 @ 1120 lbs each	2 @ 1120 lbs each	2 @ 1120 lbs each
Boom Length	15 ft	15 ft	15 ft	15 ft
Lift Capacity @ 4' Overhang	20,000 lbs	20,000 lbs	20,000 lbs	20,000 lbs
Working Capacity @ 4' Overhang	17,000 lbs	17,000 lbs	17,000 lbs	17,000 lbs
Hook Speed	43 fpm	43 fpm	43 fpm	43 fpm

*Performance equal to competition of next larger model size

Midwestern Sideboom is backed with a **180 day warranty through Midwestern Manufacturing.**

New Holland Construction Equipment is backed with a **1-Year/Unlimited Hour Standard Warranty.**

Use our dealer locator at www.newholland.com to find the dealer nearest you.



New Holland Construction
245 E. North Avenue
Carol Stream, IL 60188-2021
866-726-3396 Toll Free
630-260-4000
630-260-4369 Fax



Design, materials and/or specifications are subject to change without notice and without liability therefor. Specifications are applicable to units sold in Canada, the United States, its territories and possessions, and may vary outside these areas.

© 2008 CNH America LLC. All rights reserved. New Holland is a trademark of CNH America LLC. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH America LLC, are the property of those respective companies.



Safety begins with a thorough understanding of the equipment. Always make sure you and your operators read the Operator's Manual before using the equipment. Pay close attention to all safety and operating decals and never operate machinery without all shields, protective devices and structures in place.

Stock #NHC10310802 • 110801 • MG • PRINTED IN U.S.A.

